

## Features

- 2/3" Exview HAD Scan CCD Imager
- 1380 x 1034 active pixels
- 30 Hz frame rate
- 10-bit Camera Link digital output
- Full frame shutter
- <56 dB
- Asynchronous reset
- 50 MHz pixel clock
- RS-232C interface Control
- C-mount lens



## Description

The UP-1800DS-CL is a 10-bit digital CCD camera using progressive scan sensor. This compact and lightweight camera offers excellent signal to noise performance at a reasonable price. It's compatible with all camera link frame grabbers in the market. The "user-friendly" RS-232C interface control allows users to control all camera functions without physically touching the camera.

## Applications


UP-1800DS-CL applications include machine vision, automated inspection, motion capture and analysis, high-resolution graphics capture, medical imaging, biomedical imaging, non-contact measurement, microscopy, and other scientific and industrial applications where near infrared (NIR) and high sensitivity is required.

## Specifications:

Model	UP-1800DS-CL
CCD Sensor	2/3" Progressive scan CCD
Chip Size	10.20 mm x 8.30 mm
Effective Pixels (H x V)	1380 x 1034
Unit Cell Size (H x V)	6.45 mm x 6.45 mm
Pixel Clock	50 MHz
Frame Rate	30 FPS
Sync.	HD: 31.367 KHz; VD: 30.0 Hz
Digital Video Output	Camera Link format
Analog Video Output	1 V p-p, 75ohm (BNC or 12 pin Hirose)
S/N Ratio	<56 dB
Min. Illumination	0.02 lux
Gain	MGC
Gamma	1.0
Electronic Shutter	1/30 ~ 1/62,000 selectable
Lens Mount	C-Mount
Operating Temperature	-10 °C ~ +55 °C
Power Requirement	12 V DC, 460 mA, 5.5 W
Dimension	50mm x 39mm x 83mm
Ext. Sync.	Internal/External Auto Switch
Asynchronous Reset	Standard
Weight	200 g

Note: Custom cameras are available upon request.

## Dimension:

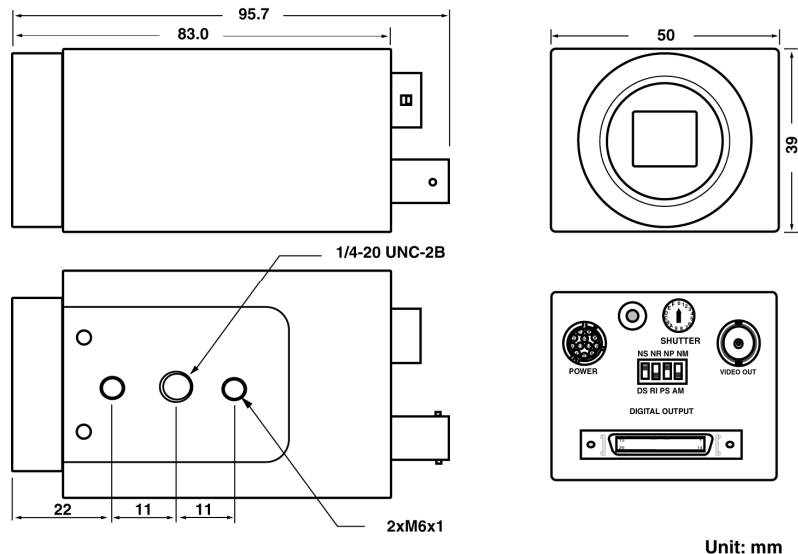

Note: Specifications are subject to change without notice