

Features

- 1/2" Progressive scan CCD imager
- 1392 x 1040 active pixels
- 10-bit Camera Link digital output
- Analog output
- RS232C interface control
- Full frame shutter
- <58 dB or better
- Asynchronous reset
- 15 Hz frame rate
- 25 MHz data clock
- C-mount lens



Description

The UP-900CL is a 10-bit digital CCD camera using progressive scan sensor. This compact and lightweight camera offers excellent signal to noise performance. It's compatible with most popular frame grabbers in the market.

Applications


UP-900CL applications include machine vision, automated inspection, motion capture and analysis, high-resolution graphics capture, medical imaging, biomedical imaging, non-contact measurement, microscopy, and other scientific and industrial applications.

Specifications:

Model	UP-900CL
CCD Sensor	1/2" Hyper HAD progressive scan interline-transfer CCD
Chip Size	7.60 mm x 6.20 mm
Effective Pixels (H x V)	1392 x 1040 (approx. 5:4 aspect ratio)
Unit Cell Size (H x V)	4.65 mm x 4.65 mm
Pixel Clock	25 MHz (50 MHz for master clock)
Frame Rate	15 fps
Sync.	HD: 15.47KHz; VD: 14.82 Hz
Digital Video Output	Camera Link format
Analog Video Output	1 V p-p, 75ohm (BNC or 12 pin Hirose)
S/N Ratio	<58 dB
Min. Illumination	0.1 lux
Gain	MGC
Gamma	1.0
Electronic Shutter	1/15 ~ 1/31,000 selectable
Lens Mount	C-Mount
Operating Temperature	-10 °C ~ +50 °C
Power Requirement	12V DC, 250mA, 3.0W
Dimension	50mm x 39mm x 83mm
Ext. Sync.	Internal/External Auto Switch
Asynchronous Reset	Standard
Weight	200 g

Note: Custom cameras are available upon request.

Dimension:

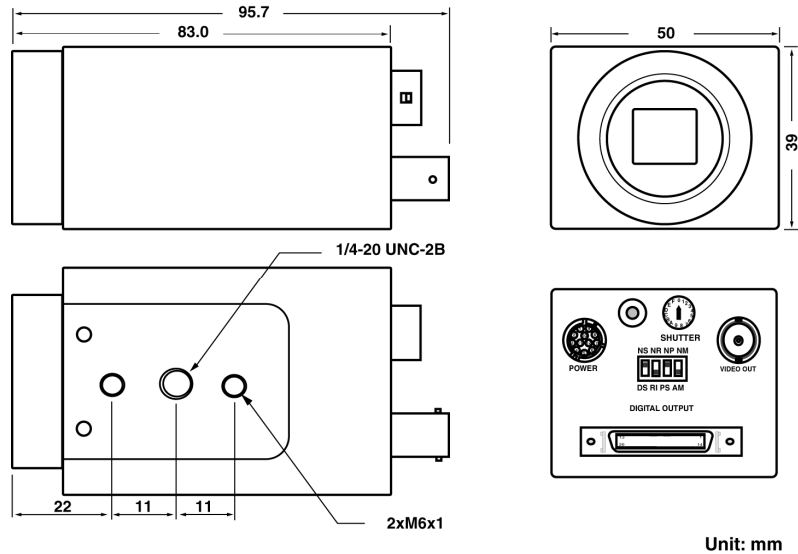

Note: Specifications are subject to change without notice